

# BUTYL TAPE

SPECIALLY FORMULATED FOR USE ON METAL ROOF & WALL PANELS



**BUTYL TAPE** was designed specifically for the metal building industry to provide optimal sealing in the harshest environments.

It adheres to most clean, dry metal surfaces and does not harden, bleed or stain. With pressure, it fills minor irregularities in the surface and seals the joints providing an effective barrier against water, moisture, dust, and dirt.

## BENEFITS OF BUTYL TAPE

- Butyl tape increases the structural strength of the roof by more than 40%.
- Prevents chemical reaction when two galvanised sheets contact each other
- Bonds the sheets together and lessens the risk of wind damage and leakage
- Will not crack or lose adhesion under expansion and contraction
- Excellent anti-vibration properties
- Seals against moisture and rust
- Has an effective life of over 20 years
- Oxidation, Chemical and age resistant
- Will not degrade under UV
- Heat resistant up to 160°C
- Non Toxic and non Hazardous



## SURFACE PREPARATION


BUTYL TAPE is compatible with most building materials, metals and flexible or hard plastics. The surface should be clean, dry, smooth and dust free. No special tools are required to install this tape.

## INSTALLATION


Prepare the surface and proceed as follows:

- Choose the most suitable size of roofing tape
- Unroll the tape until the desired length is reached
- Remove the silicone release film that covers the adhesive part of the tape and position the tape
- Press with roller or a cloth pad

Sealing Panel Endlaps

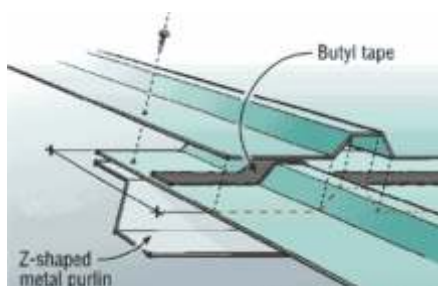

Sealing Side Seams

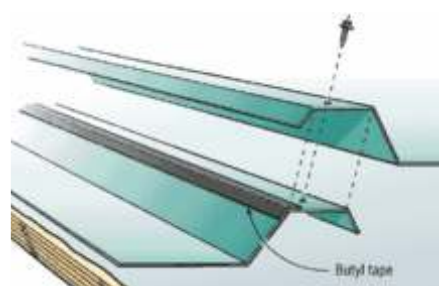

A member of the

