

Flashings and closures are made for particular applications and locations on the roof, with variations to suit the specific profile being used.


Industrial and commercial flashings tend to be functional more than aesthetic, and Safintra makes a range of standard flashings which are suitable for this purpose.





Residential flashings however, usually have an important aesthetic role which necessitates that they are designed for the structure in question.













Safintra is able to produce most custom designed flashings for residential and other applications- please ask your local branch for more information.

Flashings are usually made in the same material as the roof, for colour matching. Safintra flashings are offered in Aluminium-Zinc coated steel and Aluminium.

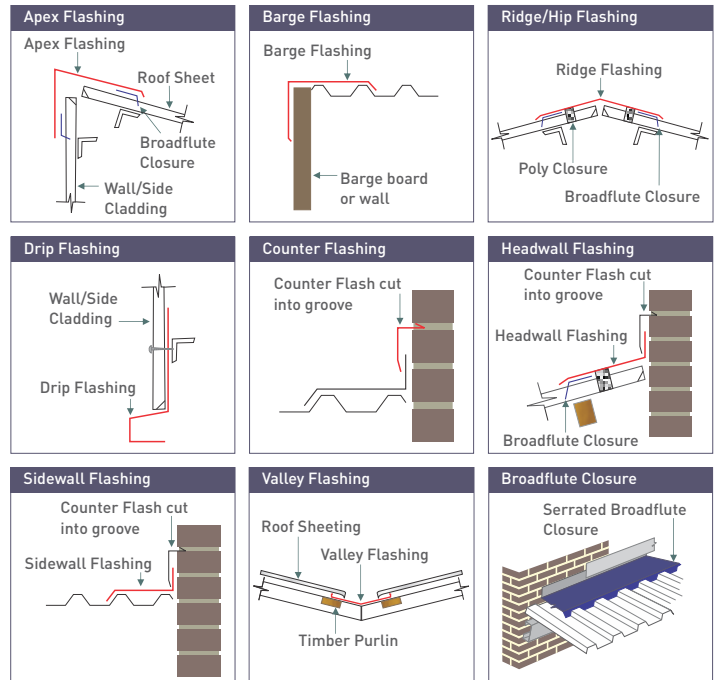Please speak to our flashings departments for further guidance and technical assistance.



CONCEALED FIX		SAFLOK 700 concealed fix roofing	SAFLOK 410 concealed fix roofing	NEWLOK standing seam roofing
<b>Apex Flashing</b> 	Dimensions (A x B)	330 x 330	330 x 330	330 x 330
	Angle	As required		
	Girth	660	660	660
<b>Barge Flashing</b> 	Dimensions (A x B)	330 x 330 x 38	330 x 240 x 38	330 x 330 x 48
	Angle	90°	90°	90°
	Girth	660	570	708
<b>Ridge Flashing</b> 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231
	Angle	140°	140°	140°
	Girth	462	462	462
<b>Hip Cap</b> 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231
	Angle	128°	128°	128°
	Girth	462	462	462
Comments		Use with broad flute closure.		

CONCEALED FIX		 SAFLOK 700 concealed fix roofing	 SAFLOK 410 concealed fix roofing	 NEWLOK standing seam roofing
<b>Drip Flashing</b> 	Dimensions (A x B x C x D)	111 x 60 x 25 x 35	111 x 60 x 25 x 35	111 x 60 x 25 x 35
	Angle	92°	92°	92°
	Girth	231	231	231
<b>Counter Flashing</b> 	Dimensions (A x B)	13 x 30 x 142	13 x 30 x 142	13 x 30 x 142
	Angle	88°	88°	88°
	Girth	185	185	185
<b>Headwall Flashing*</b> 	Dimensions (A x B)	154 x 308	154 x 308	154 x 308
	Angle	As required		
	Girth	462	462	462
<b>Side Wall Flashing</b> 	Dimensions (A x B)	154 x 270 x 38	154 x 240 x 38	154 x 270 x 48
	Angle	90°	90°	90°
	Girth	462	432	470
<b>External Corner</b> 	Dimensions (A x B)	330 x 330 x 38 x 38	330 x 330 x 38 x 38	330 x 330 x 48 x 48
	Angle	90°	90°	90°
	Girth	736	736	756
<b>Internal Corner</b> 	Dimensions (A x B)	330 x 330 x 38 x 38	330 x 330 x 38 x 38	330 x 330 x 38 x 38
	Angle	90°	90°	90°
	Girth	736	736	736
<b>Valley Flashing</b> 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231
	Angle	140°	140°	140°
	Girth	462	462	462
<b>Under-Over Flashing</b> 	Dimensions (A x B)	150 x 287	150 x 287	150 x 287
	Angle	128°	128°	128°
	Girth	437	437	437
<b>Broadflute Closure</b> 	Length Of Closure	700	410	445
	Comments	Need one closure per roof sheet.		

All dimensions given in millimetres.

Diagrams are for illustrative purposes only.

Note: 0.8mm Z-support flashings is recommended for use with Newlok.

\*To be used with broadflute poly/metal closures.