


**DUMUZAS<sup>®</sup>**



**Trusted and Reliable Roofing Product**  
from Mabati Rolling Mills Limited

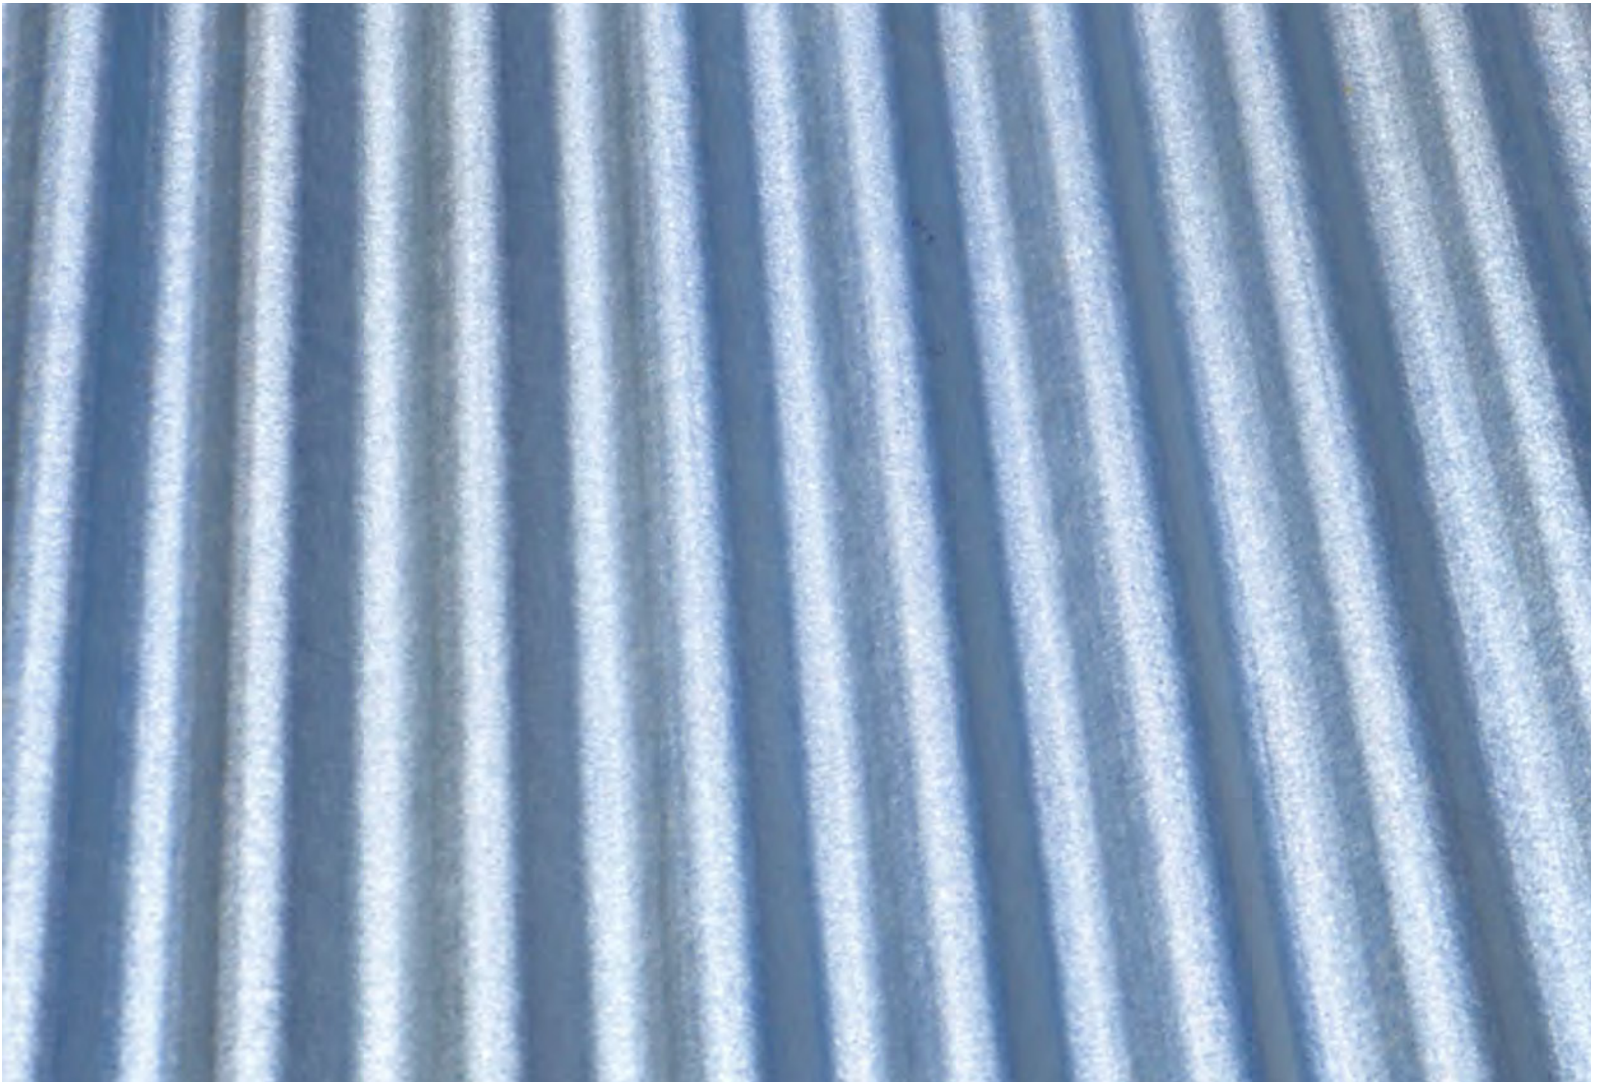


## ■ CATALOGUE

**Dumuzaz** is a revolutionary brand made from high tensile steel that has a protective metal coating of 55% Aluminium, 43% Zinc and 1.6% Silicon, resulting in a product with an extremely long life. Now with thin organic coating (TOC). The New DumuZas has increased durability and a beautiful silver finish. It has a corrugated profile with 11 ribs and a pitch [distance between ribs] of 76.2mm. It is mainly used for roofing and walling in domestic applications. It comes with matching accessories for a complete roofing solutions.

### Features and benefits

- Lasts longer than a Zinc galvanized product of the same coated thickness.
- Offers up to 4 degrees' cooler interiors.
- Has a shining beautiful silver finish.
- It is very easy to install.

### Specifications

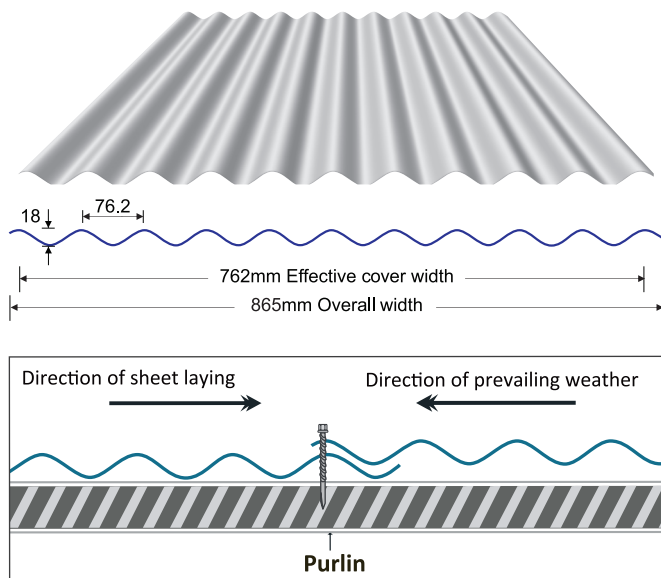

Normal Corrugation 110 (NC 110) is a sinusoidal profile with 11 corrugations and a pitch (distance between any two crests) of (76 +/- 2 mm) hence its name, and is the oldest commonest of all profiles, mainly used for roofing and walling especially in domestic applications.

### Purlin Spacings

Purlin Spacings are dependent on both downward loading and negative suction loading caused by wind. Your engineer should be consulted to calculate your load [kN/m<sup>2</sup>] for your particular application.

### Fixing Procedure

Lay each run of sheets in turn from side to side before moving onto the next run as depicted below. Similar procedure for wall cladding too.

