

Premium steel roofing tiles for an elegant finish and unrivalled durability




■ CATALOGUE

Versatile is Kenya's longest running painted steel tile that has built a legacy of affordable beauty for thousands of home owners and developers. Versatile is a premium steel tile roofing sheet with the look of a classic roof tile but with a much longer life span.

Specifications

- Profiles cover width: 1,100mm +/- 5mm
- Effective cover width: 1,015mm +/- 5mm
- Length/square meter: 985mm •

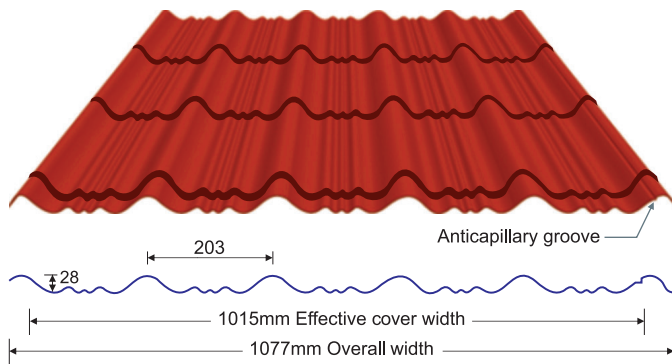

- Lengths: 600mm upwards in multiples of 300mm
Maximum recommended length for 0.32mm is 6m
- Base material: ZINCAL[®] coils made using world class patented metal coating technology
- Paint systems: Colour plus textured and Optima Plus
- Finish: Gloss or textured
Thickness: 0.32mm, 0.4mm, 0.5mm, 0.6mm (+/-10%)
Maximum 0.60mm (22g)

Material options

- Aluminium-zinc Gauge (mm)
AZ85, AZ100-AZ150: 0.32 0.40 0.50 0.60

Versatile is rolled in soft material only-

- Input coil width: 1220
- Profiled sheet width (overall width): 1077
- Rib to Rib width i.e. pitch: 203
- Depth of each tile (Step to Step): 300
- Effective cover width: 1015

Purling spacing

Battens / purlins should be spaced at 300mm on both ridge and eave (i.e.:at every tile step), and at maximum 600mm (i.e.:at every second tile step) internal spans, although battens at every step will be stronger.

Roof pitch

Versatile can be used on a roof pitched from a minimum pitch 22.5 degrees

Note: During installation, clean the roof daily by removing all swarf, Pop rivets and unused fasteners or any other debris

Features:

- Sheets
- Continuous length profile increases visual uniformity
- Reduces chance leakage
- Lightweight safer to lift and install while enabling the supporting structure to be less bulky/costly
- No underlays needed
- Rapid roof coverage
- Large panel size enables roofing to be completed faster
- Easy and secure - roofing sheets are fixed to the roof structure
- World class patented coating technology
- MRM Mark of Quality - each sheet is inspected over 6 times before dispatch
- Engineered to prevent leakage by capillary action

