



**ELEGANTILE**



**Premium steel roofing tiles for an elegant finish and unrivalled durability**





**■ CATALOGUE**

**Elegantile** combines an aesthetic from the royal Romanesque palaces with the graceful curves of a grounded tile form.

**Specifications**

Overall width	1,128mm +/- 5mm
Effective cover width	1050mm +/- 5mm
Length/square meter	952mm
Overall width	1,128mm +/- 5mm
Effective cover width	1,050mm +/- 5mm
Length/Square Meter	953mm
Lengths	600mm upwards in multiples of 300mm
Maximum recommended length for 0.32m	6m

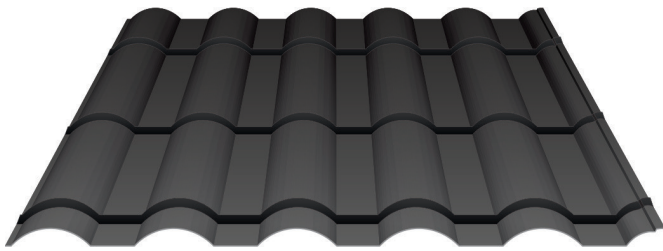

- Base material: ZINCAL© coils made using world class patented metal coating technology
- Paint systems: Color Plus Textured and optima
- Finish: Gloss or Textured
- Thickness: 0.32mm (+/- 10%)

**Material options**

Aluminum-zinc	Gauge (mm)
AZ85, AZ100-AZ150	: 0.32 0.40

Elegantile is rolled in soft material only - G330

**Roof pitch**

Elegantile can be used on a roof pitched from a Minimum Roof Pitch 22.5 degrees

**Purling spacing**

Battens / purlins should be spaced at 300mm on both ridge and eave (i.e.: at every tile step), and at maximum 600mm (i.e.: at every second tile step) internal spans, although battens at every step will be stronger.

*Note: During installation, clean the roof daily by removing all swarf, pop rivets and unused fasteners or any other debris.*

**Features & Benefits**

- Continuous length profile increases visual uniformity
- Reduces chance leakage
- Lightweight safer to lift and install while enabling the supporting structure to be less bulky/costly
- No underlays needed
- Rapid roof coverage
- Large panel size enables roofing to be completed faster
- Easy and secure - roofing sheets are fixed to the roof structure
- World class patented coating technology
- MRM Mark of Quality - each sheet is inspected over 6 times before dispatch
- Engineered to prevent leakage by capillary action

